



TECHNICAL DATA SHEET



NEW UPGRADED

External filtration set

SANDWICH
FILTRATION



TECHNICAL PARAMETERS

Dimensions (w x l x h)	1100 x 550 x 1164 mm
Weight	180 kg (including cartridges)



INSTALLATION REQUIREMENTS

Power supply	230 V, 50Hz (1+N+PE)
Power connection	EU 16 A
Pmax	0,5 kW
IN house connection	G1 - internal thread (hose Ø 25 mm)
OUT house connection	G 3/4 - internal thread (hose Ø 20 mm)
Volume of filtration housing	3 x 25 l
Service space required around the device	600 mm



STANDARD EQUIPMENT


Male Pipe Thread Hose Adapter	2 pcs
IN and OUT house	2 pcs




FILTRATION PROCESS

There is standard configuration of cartridges. Cartridge composition can be modified by type of cleaning application.

- AC1** 1st ACTIVE CARBON CARTRIDGE
- AC2** 2nd ACTIVE CARBON CARTRIDGE
- MF** MECHANICAL FILTER
- IO1** 1st IONEX CARTRIDGE
- IO2** 2nd IONEX CARTRIDGE
- IO3** 3rd IONEX CARTRIDGE
- IO4** 4th IONEX CARTRIDGE

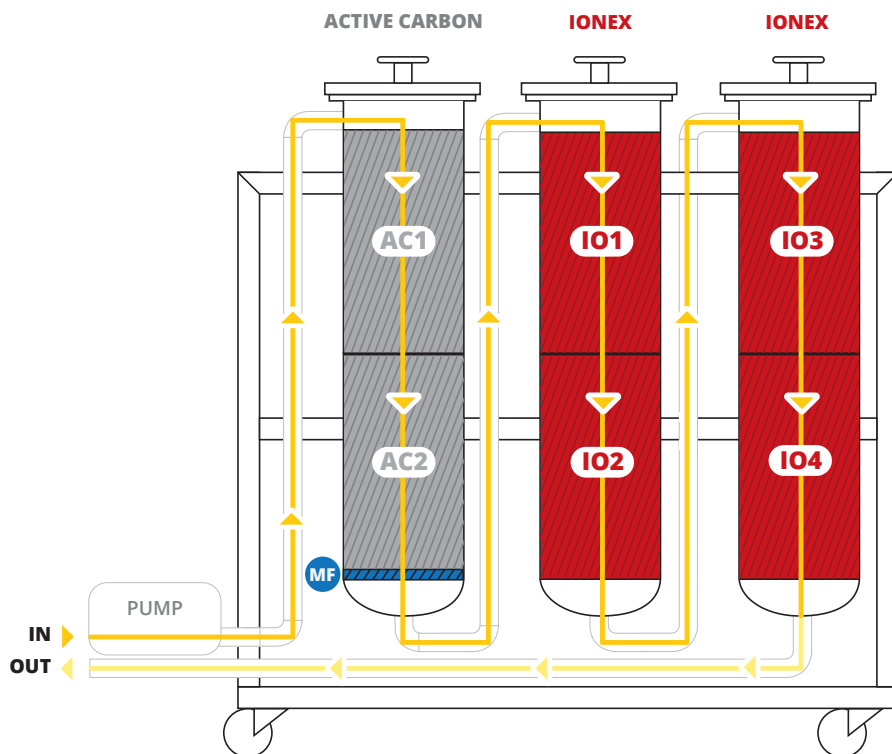

VARIABLE COMPOSITION OF SANDWICH CARTRIDGES

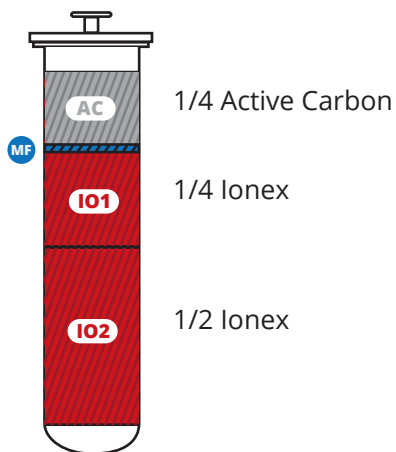

We can combine the cartridges, even in one housing. Final composition of cartridges is set according to cleaning application.



Date of issue: **October 2017**

For more information about External filtration set you can contact DCT specialist in your country or the manufacturer directly.
DCT Czech s.r.o., Tovární 85, 679 21 Černá Hora, Czech republic
e-mail: info@dct.cleaning